# C6~10kVA ONLINE UPS - Rack Style Datasheet

### Feature:

### **Zero Transfer time**

True Double Conversion Online UPS, Provide most comprehensive protect mission critical equipment from wide range power quality issues.

### **DSP Digital Control Based**

Advance DSP base digital control bring high performance of high input Power factor, low distortion, supply the load with perfect sine wave AC power supply

#### **Three Level Inverter**

Low harmony noise, high efficiency, excellent loading capability

### **Ultra Wide Input Mains range**

Strong compatible with ultra with electric environment, stay well with ultra wide range mains of  $90V^300V$ ,  $40^70Hz$ , dramatically reduce battery discharge, prolong battery life

## **Best Loading Capability**

Up to 0.9 Output Power Factor , 50/60 Hz Automatically adapting, selectable voltage , perfectly match all kind of application

## **Genset Compatible**

Capable of work with wide range of Genset, isolate fluctuation and noise from Genset, provide stable and clean power supply to the user equipment.

# High Input power factor

Thanks to digital controlled PFC Technology, >0.99 input power factor, effectively avoid power pollution , save energy expense for customer

# Reliable design

Made with strong Glass fiber base (FR4) double side PCB, company with large span component, greatly improve reliability in harsh environment, Well designed ventilation and conformal coating, avoid dust accumulation, improve resistant to corrosion.

### Open to customization

Based on powerful controller and open architecture, the product is able to be customized to match need of integration of automatic system or intelligent supervisory system


# **Specification:**

|                        | Model                | C6KRS   | C10KRS                                  |
|------------------------|----------------------|---|---|
| Capacity               | VA/W                 | 6kVA/5.4kW                                    | 10kVA/9kW                               |
| Topology               |                      | Double Conversion Online UPS                  |   |
| Phase                  |                      | Single Phase Input Single Phase Output        |   |
| Mains Input            | Wiring               | L/N+PE  |   |
|                        | Rated Voltage        | 208/220/230/240Vac                            |   |
|                        | Voltage Range        | 90~300VAC                                     |   |
|                        | Frequency Range      | 40Hz-70Hz                                     |   |
|                        | Input Power Factor   | ≥0.99   |   |
| AC Output              | Wiring               | L/N+PE  |   |
|                        | Output Voltage       | 208/220/230/240VAC                            |   |
|                        | Voltage Regulation   | ±1%   |   |
|                        | Output Frequency     | 50/60±4Hz(Sync Mode) / 50/60Hz±0.1%(Free Run) |   |
|                        | Waveform             | Pure Sine Wave                                |   |
| AC Output              | Distortion           | <2%(Linear Load)                              |   |
|                        | (THDV%)              | <7%(None-Linear Load)                         |   |
|                        | Over load capability | 10Min@105%~125%Rated Load                     |   |
|                        |                      | 60Sec.@125%~150%Rated Load                    |   |
|                        |                      | 0.5Sec.@>150%Rated Load                       |   |
| Efficiency             | AC/AC Mode           | >93%  |   |
|                        | DC/AC Mode           | >91%  |   |
|                        | Rated Battery        | 192/240VDC                                    |   |
| Battery<br>&<br>Charge | Voltage              | External Battery                              |   |
|                        | Battery Capacity     | External Battery Depends                      |   |
|                        | Backup Time          |   |   |
|                        | Charging Current     | Long Backup                                   | Time Model :4A                          |
| Physical               | Chassis Style        | Rack-   | -Mounted                                |
|                        | Rack Dimension       | UPS: 438mm(W) x 88mm(2U)(H)                   | x 500mm(D) without Internal Battery     |
|                        |                      | Battery Pack: 438mm(W                         | () x 88mm(2U)(H) x500mm(D)              |
|                        | Weight (kg)          | C6KR  | S : 14.6kg                              |
|                        |                      |   | RS: 15.0kg                              |
|                        |                      | Battery Pack: 7AHx16pcs: 39kg                 |   |
| НМІ                    | LCD DISPLAY          | Input Mains Voltage, Frequency, Loa           | ad level, Operation Mode, Health Status |
|                        | Standards            |   | OOO DODT                                |
|                        | Communication        | 1. RS232 PORT                                 |   |
|                        | Interface            |   |   |

|             | Optional Extension<br>Card | 2. NMC Card: Support remote monitor the UPS via Smart Phone APP, Web page, PC Monitor Software, Support Server / NAS shutdown  3. MODBUS Card,  4. USB Card  5. Relay Card (Needs assembly according to order request before shipping) |
|-------------|----------------------------|--|
| Operating   | Temperature range          | -10~50°C   |
| Environment | Relative Humidity          | 0-98% ( Non-condensing )   |
| Endurance   | Acoustics Noise            | <55dB @ 1 meters   |


# **UPS Outlook**<sup>3</sup>

## **Front View**

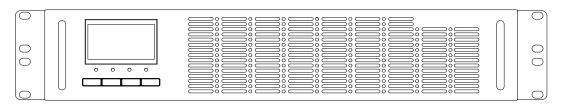

C6KRS~C10KRS 2U Rack UPS

## **Rear Panel**

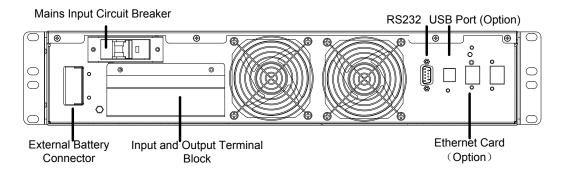

C6KRS~C10KRS Rack UPS Rear Panel

## Note:

- ① Battery Capacity and voltage is open to customization
- ② Dimension might vary for different bezel
- 3 The socket and terminal configuration on the rear panel may be different for countries or regions according to order
- 4 More parameter customization , please contact sales representative