

C6~10kVA ONLINE UPS - Tower Style Datasheet

Feature :

Zero Transfer time

True Double Conversion Online UPS, Provide most comprehensive protect mission critical equipment from wide range power quality issues.

DSP Digital Control Based

Advance DSP base digital control bring high performance of high input Power factor, low distortion , supply the load with perfect sine wave AC power supply

Three Level Inverter

Low harmony noise, high efficiency , excellent loading capability

Ultra Wide Input Mains range

Strong compatible with ultra with electric environment, stay well with ultra wide range mains of 90V~300V, 40~70Hz ,dramatically reduce battery discharge , prolong battery life

Best Loading Capability

Up to 0.9 Output Power Factor , 50/60 Hz Automatically adapting, selectable voltage , perfectly match all kind of application

Genset Compatible

Capable of work with wide range of Genset, isolate fluctuation and noise from Genset , provide stable and clean power supply to the user equipment.

High Input power factor

Thanks to digital controlled PFC Technology, >0.99 input power factor, effectively avoid power pollution , save energy expense for customer

Reliable design

Made with strong Glass fiber base (FR4) double side PCB, company with large span component, greatly improve reliability in harsh environment, Well designed ventilation and conformal coating , avoid dust accumulation ,improve resistant to corrosion.

Open to customization

Based on powerful controller and open architecture, the product is able to be customized to match need of integration of automatic system or intelligent supervisory system


Specification :

Model		C6K	C6KS	C10K	C10KS
Capacity	V/A/W	6kVA/5.4kW		10kVA/9kW	
Topology		Double Conversion Online UPS			
Phase		Single Phase Input Single Phase Output			
Mains Input	Wiring	L/N+PE			
	Rated Voltage	208/220/230/240Vac			
	Voltage Range	90~300VAC			
	Frequency Range	40Hz-70Hz			
	Input Power Factor	≥0.99			
AC Output	Wiring	L/N+PE			
	Output Voltage	208/220/230/240VAC			
	Voltage Regulation	±1%			
	Output Frequency	50/60±4Hz(Sync Mode) / 50/60Hz±0.1%(Free Run)			
	Waveform	Pure Sine Wave			
	Distortion (THDV%)	<2%(Linear Load) <7%(None-Linear Load)			
	Over load capability	10Min@105%~125%Rated Load 60Sec.@125%~150%Rated Load 0.5Sec.@>150%Rated Load			
Efficiency	AC/AC Mode	>93%			
	DC/AC Mode	>91%			
Battery & Charge	Rated Battery Voltage	144/192VDC Internal/	192/240VDC External	192VDC Internal	192/240VDC External
	Battery Capacity	12V/7AHx12Pcs / 12V/7AHx16Pcs	External Battery Depends	12V/7AHx16Pcs / 12V/9AHx16Pcs	External Battery Depends
	Backup Time	>6mins @ Half Load		>6mins @ Half Load	
	Charging Current	Standard Model with Internal Battery:1A Long Backup Time Model :4A			
Physical	Chassis Style	Tower			
	Tower Dimension	C6KS, C10KS: 190(W)X340(H)x534(D)mm C6K-12BAT:190(W)X360(H)x534(D)mm C6K-16BAT, C10K: 190(W)X456(H)x534(D)			
	Weight (kg)	C6K-12BAT: 37kg C6K-16BAT: 46.5kg	14.8kg	C10K-7AHx16: 47.8kg C10K-9AHx16: 54.2kg	16kg


HMI	LCD DISPLAY	Input Mains Voltage, Frequency, Load level, Operation Mode, Health Status
	Standards Communication Interface	1. RS232 PORT
	Optional Extension Card	2. NMC Card: Support remote monitor the UPS via Smart Phone APP, Web page, PC Monitor Software , Support Server / NAS shutdown 3. MODBUS Card, 4. USB Card 5. Relay Card (Needs assembly according to order request before shipping)
Operating Environment	Temperature range	-10~50°C
	Relative Humidity	0-98% (Non-condensing)
Endurance	Acoustics Noise	<55dB @ 1 meters

UPS Outlook®

Front View


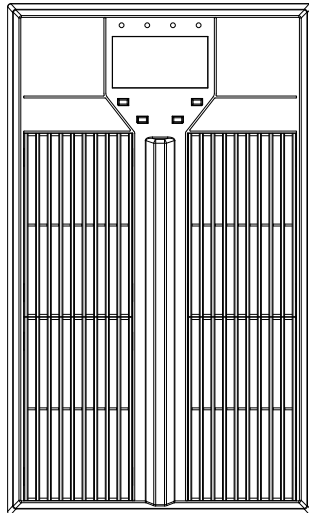


C6KS/10KS/ C6K-12BAT Bezel

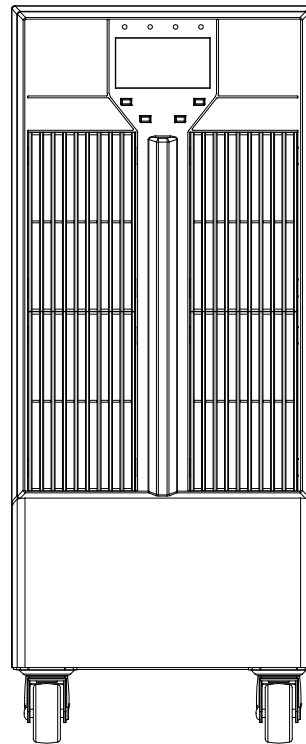

C6K/10K-16BAT Bezel

Rear Panel

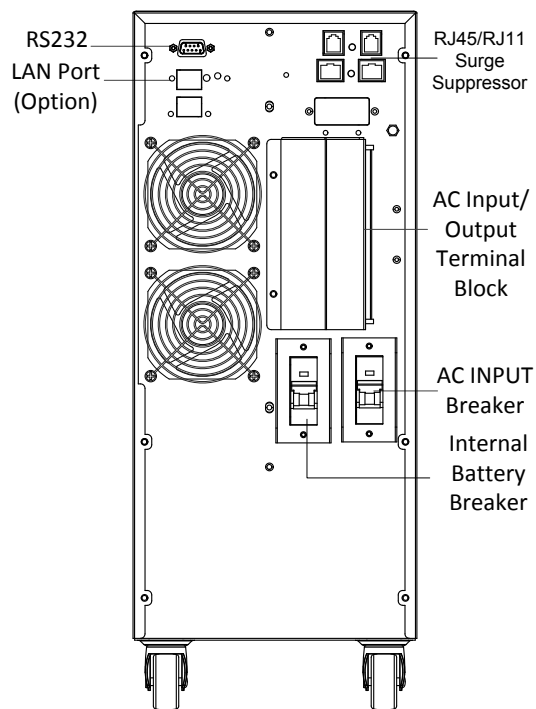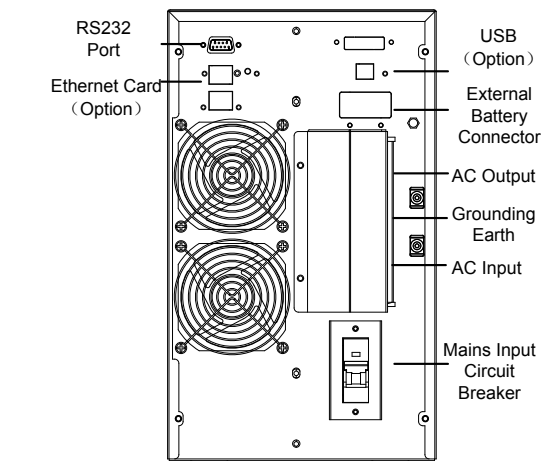

C6K(S)~C10K(S) Rear Panel

Note:

- ① Battery Capacity and voltage is open to customization
- ② Dimension might vary for different bezel
- ③ The socket and terminal configuration on the rear panel may be different for countries or regions according to order
- ④ More parameter customization , please contact sales representative